

SPECIFICATIONS

規格表

MODEL	型號	JS-602U	JS-602
Straw size	吸管尺寸	Ø3.8 mm	Ø3.8 mm
Packing material	包裝材料	OPP film	OPP film
OPP Film width	包裝紙寬度	Straw length (corrugated) +34 mm	Straw length +34 mm
Wrapped straw length	包裝後吸管長度	100 - 140 mm	120 - 160 mm
Speed	速度	350 - 500 pcs/min	500 - 750 pcs/min
Pitch between two straws	吸管中心間距	21.99 mm	15.7 mm
Unwind paper core	捲取紙心	Ø3"	Ø3"
Driving motor	傳動馬達	2 HP x 6 P + invertor	2 HP x 4 P + invertor
Air blower	風車	2 HP	2 HP
Sharp end cutting unit	斜口切刀	1 set	-
Waste suction device	切口廢料收集	1 set	-
FORMING UNIT			
Copper forming pressure roller	銅製成型壓輪	1 set (20 cavities)	1 set (28 cavities)
Heater	電熱	1550 W	1550 W
Temperature controller	溫度控制器	1 set	1 set
Film take up roller with vacuum (Material: silicon)	真空引取輪 (材質: 矽利康)	1 set (30 cavities)	1 set (42 cavities)
Air cylinder	氣壓軸	4.8 mm (dia.) x 8 x 2 pcs	4.8 mm (dia.) x 8 x 2 pcs
Punching unit	去角器	1 set	1 set
Motor for winding	捲取馬達	60 W	60 W
Auto counter	自動計數器	1 set	1 set
Emergency stop	急停開關	1 pc	1 pc
Total electricity	總用電量	4.1 KW	4.55 KW
Machine dimensions	機械尺寸	4600 x 1500 x 2450 mm	4000 x 1500 x 1850 mm
Machine weight	機械重量	2000 kgs	1600 kgs

All specifications and design characteristics are subject to change without prior notice.



壯鋼機械股份有限公司

JUMBO STEEL MACHINERY CO., LTD.

公司: 台中市工業區工業12路4號 電話: +886-4-2359-0788 (總機)

NO. 4, ROAD 12, TAICHUNG INDUSTRIAL PARK, TAICHUNG, TAIWAN.

TEL: +886-4-2359-0788 (Rep.) / 2359-1788 E-MAIL: sales@jumbosteel.com.tw

FAX: +886-4-2359-0567

jumbostl@ms15.hinet.net

http://www.jumbosteel.com.tw

2006.01.2000-2



JS-602U

"U" SHAPE TETRAPAK STRAW PACKING MACHINE




JS-602


"I" SHAPE TETRAPAK STRAW PACKING MACHINE

直型利樂包吸管包裝機

Choose from these two great options

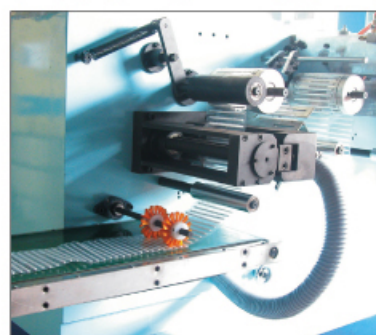

Conveyor for manual collection
(Matches with vertical perforation)

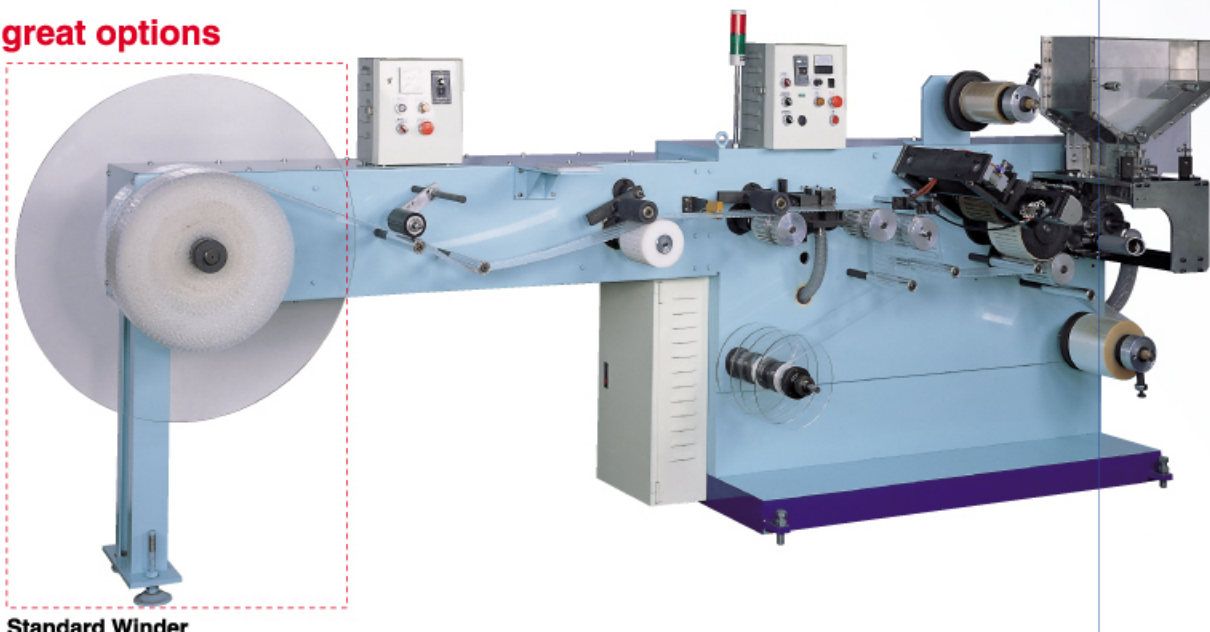

Standard Winder

JS-602U

"U" SHAPE TETRAPAK STRAW PACKING MACHINE


U型利樂包吸管包裝機



Standard Winder




Option:
Provides the option of
changing into Z mega
box folder

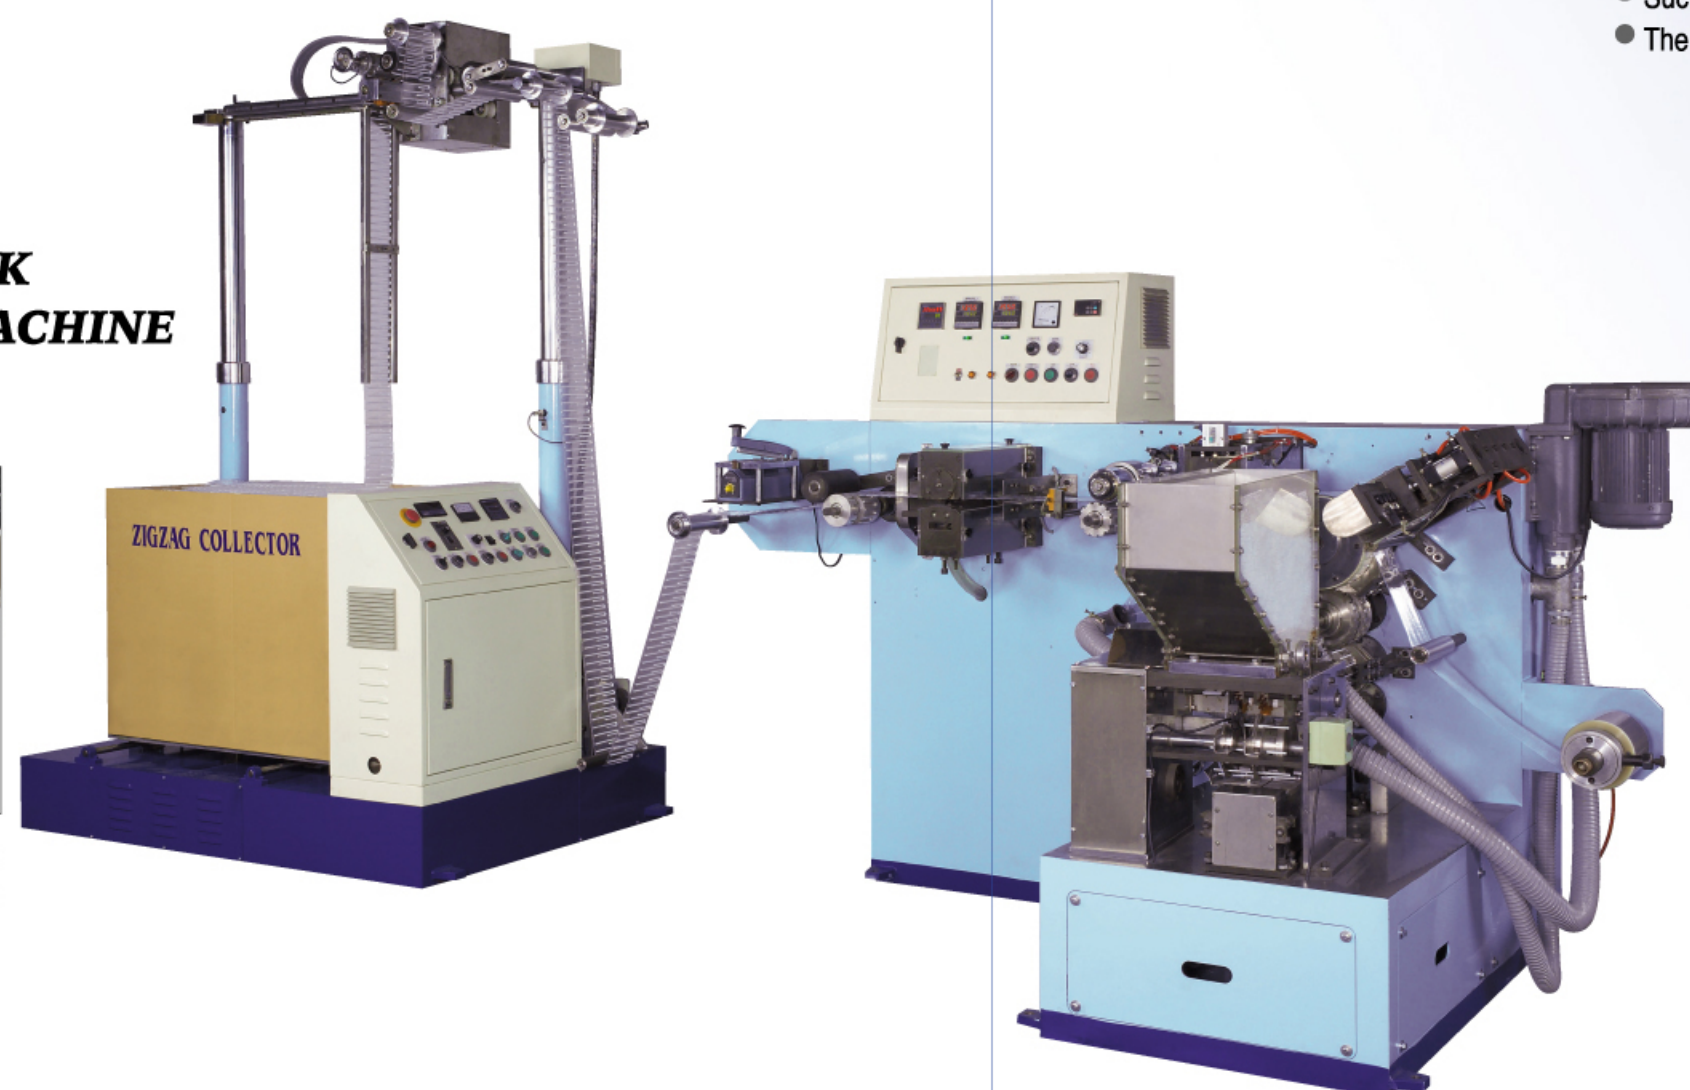


SHARP END CUTTING MECHANISM
斜口切刀裝置

The machine can perform sharp end cutting on the straw without the need for an additional machine. This allows sharp ends of straws to wrap in the same direction.

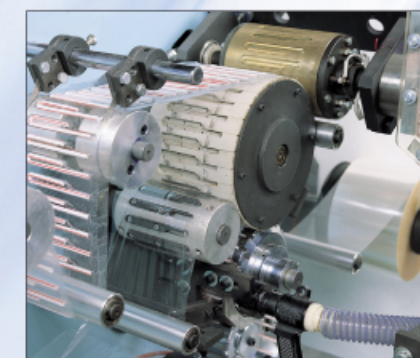

SEALING WRAPPING MECHANISM
(JS-602U)
成型與切口之廢料收集 (JS-602U)

The mechanism performs waste suction, pressing and sealing operations. Copper forming pressure roller is designed with 20 cavities.


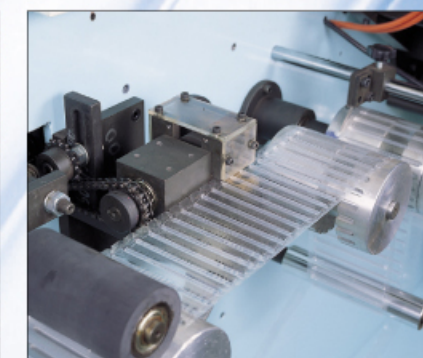


SYNCHRONIZED PUNCHING SPEED
同步去角

The punching speed is synchronized with straw feed speed to ensure accurate cutting. (For easy tear)

FEATURES:

- The machine can perform sharp end cutting on the straws, ensuring all sharp ends are packed in the same direction.
- All machine speeds are variable.
- High production rate of 350 - 500 pcs/min. (JS-602U)
- Automatic machine stop in the event of straw jamming.
- Automatic product counting. Product quantity preset. Once the preset value is reached, the alarm will sound.
- All rollers are manufactured from aluminum.
- Suction device for sharp end waste.
- The machine is easy to operate with minimum trouble.

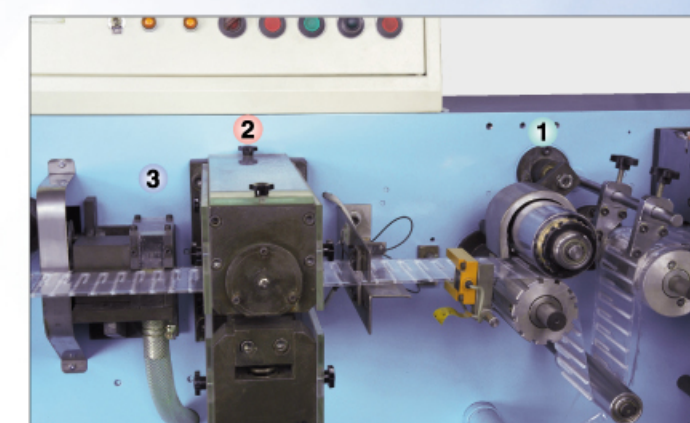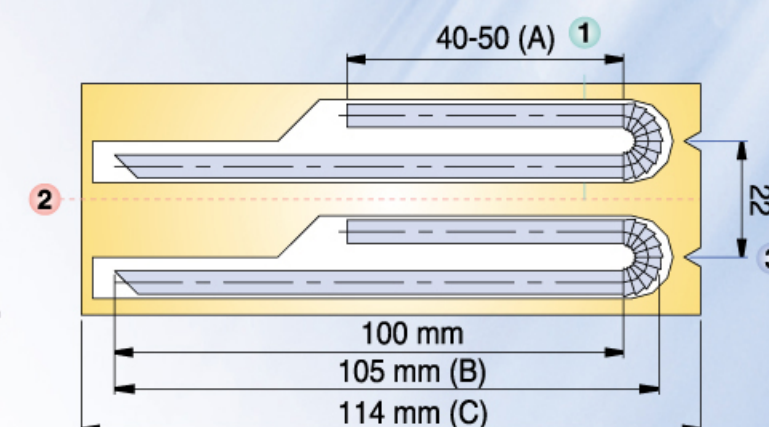

- OPTION:**
- 1 Horizontal perforation.
 - 2 Vertical perforation
 - 3 Easy tear edge punching.