

### SPECIFICATIONS

### 規格表

MODEL	型號	JS-602U	JS-602
Straw size	吸管尺寸	Ø3.8 mm	Ø3.8 mm
Packing material	包裝材料	OPP film	OPP film
OPP Film width	包裝紙寬度	Straw length (corrugated) +34 mm	Straw length +34 mm
Wrapped straw length	包裝後吸管長度	100 - 140 mm	120 - 160 mm
Speed	速度	350 - 500 pcs/min	500 - 750 pcs/min
Pitch between two straws	吸管中心間距	21.99 mm	15.7 mm
Unwind paper core	捲取紙心	Ø3"	Ø3"
Driving motor	傳動馬達	2 HP x 6 P + invertor	2 HP x 4 P + invertor
Air blower	風車	2 HP	2 HP
Sharp end cutting unit	斜口切刀	1 set	-
Waste suction device	切口廢料收集	1 set	-
<b>FORMING UNIT</b>	<b>成型部份</b>		
Copper forming pressure roller	銅製成型壓輪	1 set (20 cavities)	1 set (28 cavities)
Heater	電熱	1550 W	1550 W
Temperature controller	溫度控制器	1 set	1 set
Film take up roller with vacuum (Material: silicon)	真空引取輪 (材質: 矽利康)	1 set (30 cavities)	1 set (42 cavities)
Air cylinder	氣壓軸	4.8 mm (dia.) x 8 x 2 pcs	4.8 mm (dia.) x 8 x 2 pcs
Punching unit	去角器	1 set	1 set
Motor for winding	捲取馬達	60 W	60 W
Auto counter	自動計數器	1 set	1 set
Emergency stop	急停開關	1 pc	1 pc
Total electricity	總用電量	4.1 KW	4.55 KW
Machine dimensions	機械尺寸	4600 x 1500 x 2450 mm	4000 x 1500 x 1850 mm
Machine weight	機械重量	2000 kgs	1600 kgs

All specifications and design characteristics are subject to change without prior notice.



壯鋼機械股份有限公司

JUMBO STEEL MACHINERY CO., LTD.

公司: 台中市工業區工業12路4號 電話: +886-4-2359-0788 (總機)

NO. 4, ROAD 12, TAICHUNG INDUSTRIAL PARK, TAICHUNG, TAIWAN.

TEL: +886-4-2359-0788 (Rep.) / 2359-1788 E-MAIL: sales@jumbosteel.com.tw

FAX: +886-4-2359-0567

jumbostl@ms15.hinet.net

http://www.jumbosteel.com.tw

2006.01.2000-2



# JS-602U

## "U" SHAPE TETRAPAK STRAW PACKING MACHINE




# JS-602


## "I" SHAPE TETRAPAK STRAW PACKING MACHINE

直型利樂包吸管包裝機

Choose from these two great options

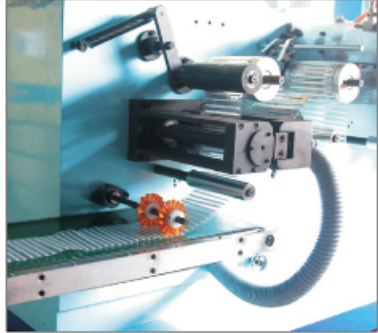

Conveyor for manual collection  
(Matches with vertical perforation)

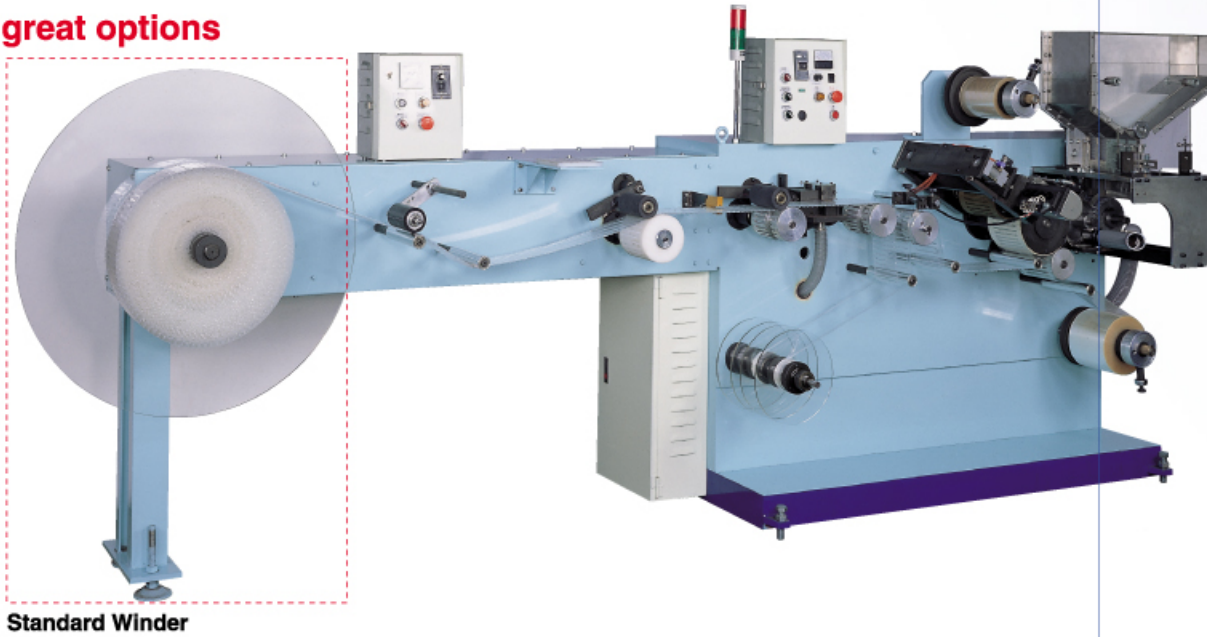

Standard Winder


# JS-602U

## "U" SHAPE TETRAPAK STRAW PACKING MACHINE


U型利樂包吸管包裝機



Standard Winder

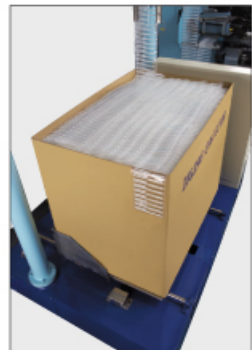


Option:  
Provides the option of  
changing into Z mega  
box folder

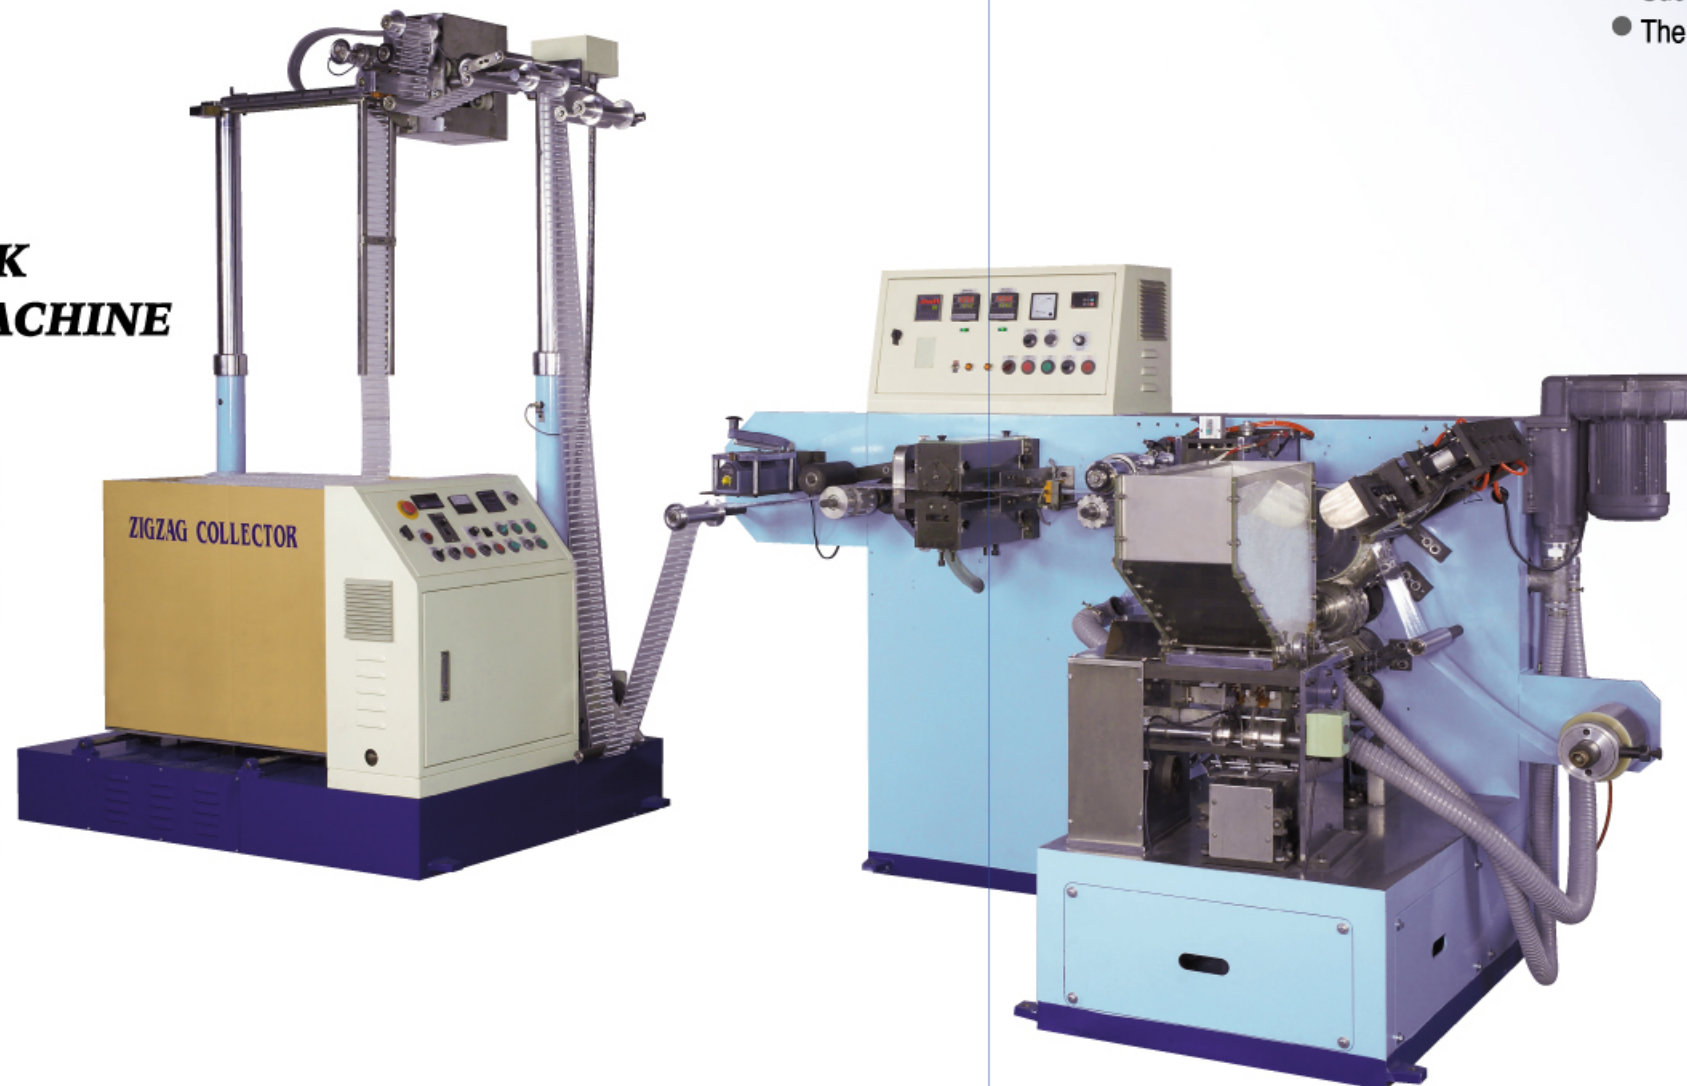


**SHARP END CUTTING MECHANISM**  
斜口切刀裝置

The machine can perform sharp end cutting on the straw without the need for an additional machine. This allows sharp ends of straws to wrap in the same direction.

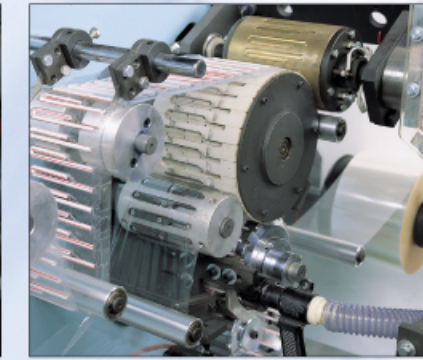

**SEALING WRAPPING MECHANISM**  
(JS-602U)

成型與切口之廢料收集 (JS-602U)  
The mechanism performs waste suction, pressing and sealing operations. Copper forming pressure roller is designed with 20 cavities.


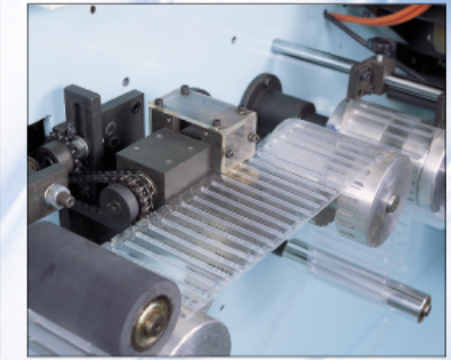


**SYNCHRONIZED PUNCHING SPEED**  
同步去角

The punching speed is synchronized with straw feed speed to ensure accurate cutting. (For easy tear)

### FEATURES:

- The machine can perform sharp end cutting on the straws, ensuring all sharp ends are packed in the same direction.
- All machine speeds are variable.
- High production rate of 350 - 500 pcs/min. (JS-602U)
- Automatic machine stop in the event of straw jamming.
- Automatic product counting. Product quantity preset. Once the preset value is reached, the alarm will sound.
- All rollers are manufactured from aluminum.
- Suction device for sharp end waste.
- The machine is easy to operate with minimum trouble.

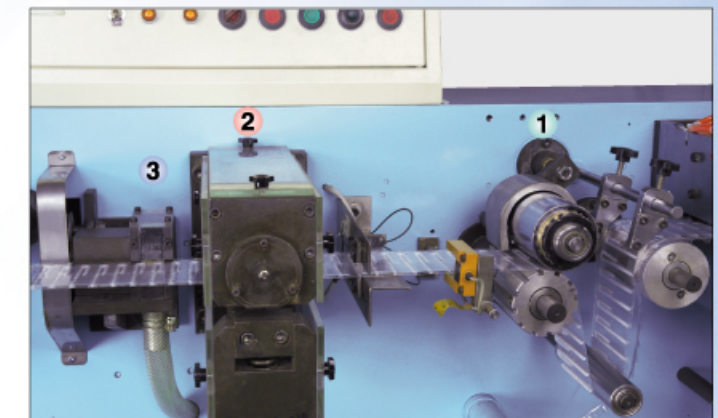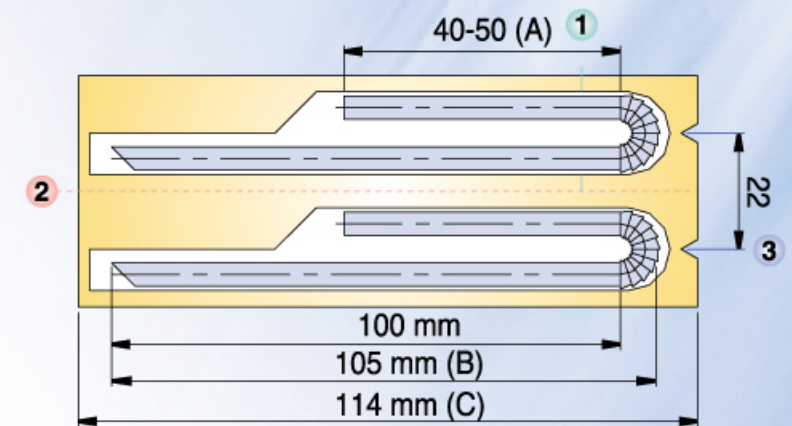

- OPTION:**
- 1 Horizontal perforation.
  - 2 Vertical perforation
  - 3 Easy tear edge punching.